


G-Series Wound

G-Series Wound Depth Filter cartridges:

- Available in a wide variety of lengths and micron ratings from 9.75 to 50 inches and 0.5-400 μ
- Medias to fit all applications including: FDA polypropylene, bleached cotton, FDA bleached cotton, natural cotton, polyester, nylon and glass
- Core materials include: polypropylene, 304 & 316 stainless steel, tin and glass
- Performance-enhancing end-configurations available to fit every process requirement



Flow Rate vs Pressure Drop

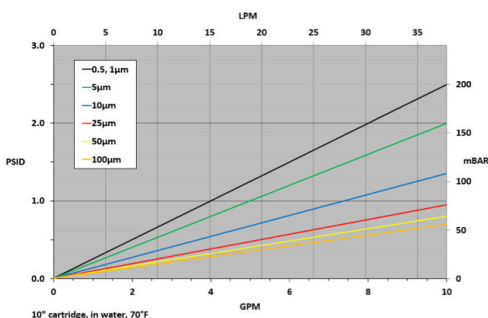

Typical Applications

- Chemicals
- Pharmaceutical
- Consumer Products
- Photographic
- Food and Beverage
- Plating Solutions
- Lubricating Oils
- Edible Oils
- Paints
- Water
- Inks
- Waste Treatment
- Petrochemicals

Construction Materials

- Filtration Media**..... See Table
- End Caps**..... Polypropylene
- Core**..... See Table
- O-Rings/Gaskets**..... Buna, EPDM, Silicone, Teflon®, Viton®

Operating Conditions

- Change Out Δ P (recommended)**.....35 PSID
- Temperature (max)**..... Dependent on materials of construction)
- Differential Pressure (max)**.....50 PSID (3.4 bar) at 68°F (20°C)

Dimensions (Nominal)

- Length**.....9.75 to 50 inches (24.8 to 127 cm)
- Outside Diameter**.....2.5 inches (6.4 cm) or 4.5 inches (11.4 cm)
- Inside Diameter**.....1.06 inches (2.69 cm)

Ordering Information

G	Media	Rating (μ)		Diameter	Length	Core	End Cap Style	O-Rings
	P = FDA Polypropylene	0.5	1	A = 2.5	9.75" (24.76cm)	P = Polypro	2P= DOE Flat Polyfoam Gasket	B = Buna
	C = Bleached Cotton	3	5	BB = 4.5	9.875" (25.08 cm)	A = 304 SS	3 = 222 w/Fin	E = EPDM
	CC = FDA Bleached Cotton	10	20		10" (25.4 cm)	S = 316 SS	4 = 222 w/Flat Cap	S = Silicone
	CN = Natural Cotton	25	30		19.5" (49.53 cm)	T = Tin	5 = 222 w/Spring	T = Teflon®
	PE = Polyester	50	75		20" (50.8 cm)	FG = Glass	6 = 226 w/Flat Cap	V = Viton®
	N = Nylon	100	200		29.25" (74.26 cm)		7 = 226 w/Fin	
	G = Glass	250	400		30" (76.2 cm)		8 = 226 w/Spring	
					39" (99.1 cm)		9 = SOE w/ Spring	
					40" (101.6 cm)		10 = DOE w/PP Core Extender	
					50" (127 cm)		10K = DOE w/ Crimped Ext. Core	
							10X = DOE w/ SS Core Extender	

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.

DS_G WOUND_190701



Corporate Office
7201 Mt. Vernon Road SE
Cedar Rapids, IA 52403 USA

Phone
Phone: + 1 877 603 1003
Fax: + 1 319 743 0220

Online
Website: www.globalfilter.com
www.filtrationgroup.com