



OSMONICS

SS Series

Tonkaflo® Pumps



## ■ Tonkaflo SS Pumps

As the industry standard for reverse osmosis (RO), TONKAFLO SS Series pumps are backed by years of proven experience. The SS Series is a stainless steel multi-stage centrifugal pump with Noryl\* plastic impellers. To reduce pump wear, SS Series pumps operate at lower speeds than single-stage pumps while achieving equivalent boost pressures. The SS Series' flexible, multi-stage design allows users to achieve their exact pressure requirements by adding or removing stages.

Specifically designed to meet the challenges of industrial membrane systems, SS Series pumps excel in any high-pressure application. TONKAFLO SS Series pumps are ideal for water boost and recirculation in buildings, high-pressure transfer, and spray applications.

## ■ Operating Specifications


- Motor .....Standard Air-Cooled  
NEMA Motors (3500 rpm)
- Capacity .....1.4 to 300 gpm  
(5.3 to 1136 Lpm)
- Pressures .....up to 700 psid (48.3 bar)
- Total Discharge  
Head Pressure .....up to 1000 psig (69 bar)
- Maximum Operating  
Temperature .....Standard: 125°F (52°C)
- Mounting .....Horizontal (all),  
Vertical (limited)

\* Noryl is a trademark of General Electric Co.  
\*\* Teflon is a registered trademark of E.I. DuPont de Nemours & Company, Inc.

## ■ Features and Benefits

- **Corrosion-Resistant Construction** including Noryl plastic diffusers and impellers and 316 stainless steel pump case and shaft ensure long-lasting performance.
- **Modular Liquid End** allows service of the mechanical seal without disassembling the liquid end of the pump. The SS Series' modular design also simplifies service of both pump and bearing frame, and permits design flexibility when positioning piping.
- **Wide Selection** of pump models is available. There is an SS Series pump to fit any pressure or flow.
- **Separate Bearing Frame** increases pump reliability by eliminating thrust load on the motor. In addition, this feature allows the SS Series pumps to be powered by standard motors.
- **Customized** SS Series pumps are available on a pre-approved and limited basis. Contact your local sales office for availability and pricing.
- **Industry Standard Mechanical Seal** on pump inlet delivers higher boost pressure capability and longer seal life, and simplifies specifying and finding replacement parts.
- **High Pressure Reverse Osmosis** - The SS Series pumps feature the K-Bearing frame which eliminates alignment problems by close-coupling the pump to motors up to 100 Hp.

## Housing Specifications

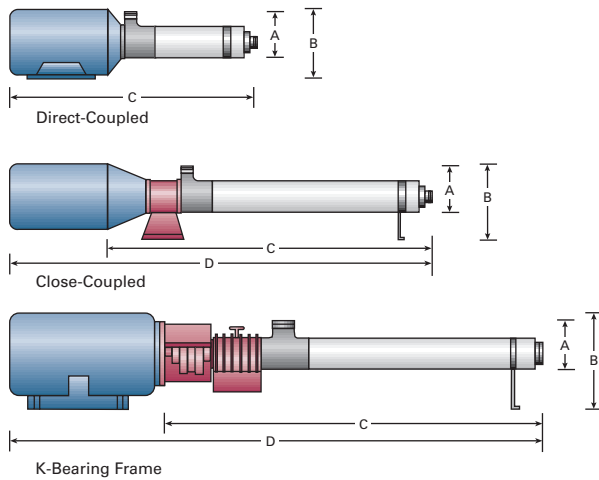

### Direct-Coupled Pumps

Model	A	B	C
SS 500-inches	3.6	5.8	19.1-46.6
(mm)	(91)	(147)	(485-1184)
SS 1800	3.6	6.6	21.4-35.1
(mm)	(91)	(168)	(544-892)

### Close-Coupled Pumps

Model	A	B	C	D
SS 500-inches	3.6	6.8	38.6-61.7	49.8-75.6
(mm)	(91)	(173)	(980-1567)	(1265-1920)
SS 1800	3.6	7.6-9.4	32-67.3	46-82.8
(mm)	(91)	(193-239)	(813-1709)	(1168-2103)
SS 2800	3.6	7.6-9.4	34.8-88.9	46-103.4
(mm)	(91)	(193-239)	(884-2258)	(1168-2626)
SS 5500	5.4	8.8-10.5	27.6-47	41.5-62.5
(mm)	(137)	(224-267)	(701-1194)	(1054-1588)
SS 8500	5.4	8.8-10.5	29.6-47	43.5-61.5
(mm)	(137)	(224-267)	(752-1194)	(1105-1562)
SS 12500	5.4	8.8-10.5	27.8-41.6	41.7-56.1
(mm)	(137)	(224-267)	(706-1057)	(1059-1425)
SS 24000	5.4	10.8	30.8-39.4	43.2-61.4
(mm)	(137)	(274)	(782-1001)	(1097-1560)


### K-Bearing Frames

Model	A	B	C	D
SS 5500-inches	5.4	10.5-11.3	49.4-101.3	64.2-125
(mm)	(137)	(267-287)	(1255-2573)	(1631-3175)
SS 8500	5.4	10.5-12.3	45.4-102.1	60.2-127.4
(mm)	(137)	(267-312)	(1153-2593)	(1529-3236)
SS 12500	5.4	10.5-13.3	50.0-122.7	70.6-149.6
(mm)	(137)	(267-338)	(1270-3117)	(1793-3800)
SS 24000	5.4	11.5-13.5	49.8-96.6	71.9-123.5
(mm)	(137)	(292-343)	(1265-2454)	(1826-3137)

For 50 Hz and specific performance data please see individual performance curves. Dimensions vary by model.

## Performance Curve (60Hz)

(Logarithmic Scale)

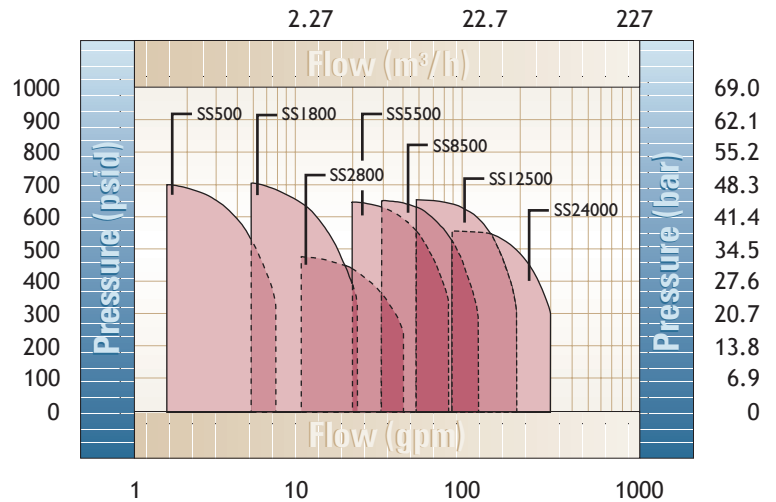

## General Specifications

### Standard Models Available:

60 Hz: (9) 500	(11) 8500	50 Hz: (10) 500	(12) 8500
(10) 1800	(9) 12500	(10) 1800	(13) 12500
(7) 2800	(10) 24000	(7) 2800	(10) 24000
(9) 5500		(13) 5500	

### Materials of Construction:

Pump Shell	316 Stainless Steel
Diffusers and Impellers	Standard: Noryl
Shaft	316 Stainless Steel
Discharge Housing	316 Stainless Steel
Inlet Housing	316 Stainless Steel
Seal Elastomers	Standard: Buna-N Optional: EPDM
Shaft Bearings	Standard: Buna-N Optional: Teflon
Mechanical Seal	John Crane Standard: Buna-N, Carbon-Ceramic Seal

### Connections:

- 0.75-inch (19.1 mm) FNPT (500 Series)
- 1.25-inch (31.8 mm) Victaulic (1800, 2800 Series)
- 3.0-inch (76.2 mm) Victaulic (5500, 8500, 12500 Series)
- 4.0-inch (101.6 mm) Victaulic-Inlet (24000 Series)
- 3.0-inch (76.2 mm) Victaulic-Discharge (24000 Series)

### Power\*\*:

- 60 Hz - 3-phase (208-230/460 volt)
- 60 Hz - 1-phase (115/208-230 volt)
- 50 Hz - 3-phase (190/380 volt)
- 50 Hz - 1-phase (110/220 volt)

\* 575 volt and 380 volt 60 Hz as well as 220 and 415 volt 50 Hz are available on request.

### For More Information:

Call **Osmonics Process Water Group** at **(952) 933-2277** or **(888) 898-6766**, or visit **www.osmonics.com**



# OSMONICS

#### North American Sales

5951 Clearwater Drive  
Minnetonka, MN  
55343-8995  
USA  
(952) 933-2277 Phone  
(952) 933-0141 Fax

#### Latin American Sales

Rua Pastuer, 463, 13 Andar  
Centro Empresarial Jactoba  
Curitiba - PR, CP 80250-080  
BRAZIL  
+55 41 312 1691 Phone  
+55 41 312 1699 Fax

#### Euro/Africa Sales

230 rue Robert Schuman  
ZA des Uselles  
77350 Le Mée sur Seine  
FRANCE  
+33 1 64 10 2000 Phone  
+33 1 64 10 3747 Fax

#### Asia/Pacific Sales

1044/8 SOI 44/2  
Sukhumvit Road Prakanong  
Bangkok 10110  
THAILAND  
+66 2 38 14213 Phone  
+66 2 39 18183 Fax