

Purtrex*

melt blown depth filter for general industrial use



features and benefits

- Exceptional value for general applications
- Progressive graded density captures particles throughout the entire filter
- Long life and lower change-out frequency
- Exceptional dirt holding capacity
- Pure polypropylene construction
- No wetting agents, solvents, antistatic agents, or binders

applications

- General industrial use
- Potable water filtration
- Chemical filtration
- Plating baths
- Amine filtration

specifications

Table 1: Specifications and performance information

Ratings	1, 3, 5, 10, 20, 30, 50, 75 microns (nominal)	
Inner Diameter (nominal)	1 in (2.5 cm)	
Outer Diameter	2.5 in (6.4 cm)	
Lengths		
	9 3/4 in (24.8 cm)	29 1/4 in (74.3 cm)
	10 in (25.4 cm)	30 in (76.2 cm)
	19 1/2 in (49.5 cm)	40 in (101.6 cm)
	20 in (50.8 cm)	50 in (152.4 cm)
<i>Longer lengths up to 70 in may be available upon request</i>		

Materials of Construction

Filter Media	Polypropylene
Adapters	Polypropylene
Elastomer	Buna, EPDM, Silicone, Viton ¹ , Santoprene ² (flat gasket only)

Performance Conditions

Maximum pressure drop:	35 psid (2.4 bar) @ 100°F (38°C)
Recommended change-out pressure drop:	20 psid (1.4 bar) @ 77°F (25°C)

efficiency information

Table 2: Removal efficiency based on a modified ASTM 795 test procedure


Micron Rating	Removal rating (µm) at various efficiencies		
	90.0%	99.0%	99.9%
1 µm			
3 µm			
5 µm			
10 µm			
20+ µm			

Efficiency of nominal filters varies by application. See note for information on nominal filter efficiency³

Find a contact near you by visiting www.suezwatertechnologies.com and clicking on "Contact Us."

*Trademark of SUEZ; may be registered in one or more countries.

©2019 SUEZ. All rights reserved.

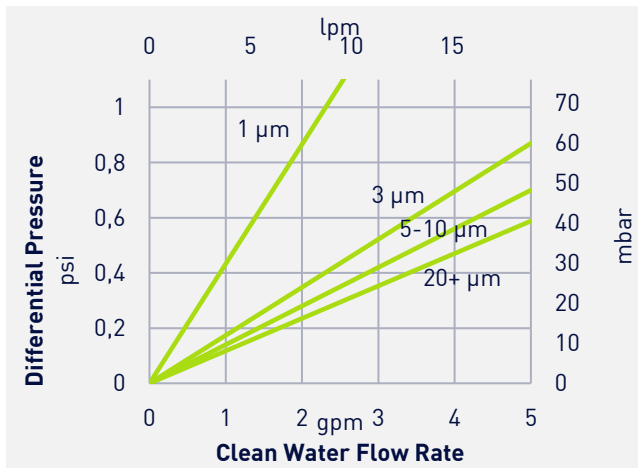

Graph 1: Purtrex clean water flow rate based on a 10 in length filter

quality

Purtrex filters are manufactured under a quality management system that has been certified to meet ISO 9001 standards. Each filter is assigned a lot code to ensure traceability of the data and materials used in the manufacturing process.

certifications

- U.S. FDA 21CFR 177.1520 food contact requirements
- Article 3 of the EU Framework Regulation No. 1935/2004/EC safety requirements
- EU Plastics Regulation No. 10/2011 (may be used as intended in compliant EU Member states)
- USP class VI-121°C Plastics criteria
- NSF 42 and 61 criteria
- ISO 9001 criteria

SUEZ filter cartridges are designed and manufactured for resistance to a wide range of chemical solutions. Conditions will vary with each application and users should carefully verify chemical compatibility. Please contact your SUEZ representative for more information.

ordering information

Replace the numbers with your desired values from each column. Columns 3, 4, and 5 are optional depending on the desired configuration. Use “-B” if you would like bulk packaging.

Example: PX 05-40-EHB



Table 3: Ordering information

	1	2	3	4	5
Type	Micron Rating (nominal)	Cartridge Length	End #1 Adapter	End #2 Adapter	Elastomer Material
PX	01 = 1 µm	9 ¾ in (24.8 cm)	E = 222 O-Ring	H = Fin	B = Buna E = EPDM P = Santoprene ² (flat gasket only) S = Silicone V = Viton ¹
	03 = 3 µm	10 in (25.4 cm)	L = Extended Core	K = Self Seal Spring	
	05 = 5 µm	19 ½ in (49.5 cm)	X = Standard Plain End (no gasket)	S = Solid End	
	10 = 10 µm	20 in (50.8 cm)	Y = Flat Gasket	Y = Flat gasket	
	20 = 20 µm	29 ¼ in (74.3 cm)			
	30 = 30 µm	30 in (76.2 cm)			
	50 = 50 µm	40 in (101.6 cm)			
	75 = 75 µm	50 in (152.4 cm)			
		<i>Longer lengths up to 70 in may be available upon request</i>			

¹Viton is a registered mark of DuPont

²Santoprene is licensed to Advanced Elastomer Systems, L.P.

³Absolute-rated filters have been designed and tested to reject at least 99% of particles of the listed micron size. Nominal-rated filters have a wider distribution of pore sizes and therefore a wider distribution of rejected particle sizes. The nominal rating is primarily used to compare efficiencies across a filter family and between filter manufacturers. Efficiency is dependent on particle shape, size, composition, application, and testing protocol.

